

TECHNICAL SPECIFICATION

TITAN-C


Washer



		Non-Heater
CYLINDER		
Drum Volume	cu.ft (l)	5.2 (147)
Diameter	in. (mm)	24 (610.8)
Depth	in. (mm)	20.4 (518.1)
Capacity	lb (kg)	35 (15)
DIMENSIONS		
Product (WxHxD)	in. (mm)	29 (737) x 40.8 (1,036) x 32 (814)
With Door Opening	in. (mm)	53 (1,370)
Carton (WxHxD)	in. (mm)	31 (788) x 44.3 (1,125) x 33.3 (846)
Weight (Product/Carton)	lb (kg)	221.8 (100.6)/248 (112.5)
SPEED		
Wash	RPM	46
Extract (High Speed)	RPM	980
G-force	G	327
RATING		
Electric Ratings	V/Hz/A	120/60/5 220-240/50/5 220/60/5
WATER USAGE		
Water Consumption	gal (l)	17.8 (67.6)
NOISE & CYCLE TIME		
Noise Level (Sound Power)	dB	Lower than 62
Program Duration in Minutes (Default)	min	35
SYSTEM & CONTROL		
Inverter Direct Drive Motor		0
Intelligent Electronics Controls		0
Heating System	W	1,000 (Only for Tub Clean)
Compartment Dispenser		3 Compartment Dispensers
Drain System		Gravity Drain
Pricing Program		Special Vended Price
Emergency Stop Button		0 (OPL Only)
Auto Dosing Interface		0
Damper		4 Friction Dampers
PROGRAMS		
Program List		Hot Warm Cold Delicates Add Super Wash (Card & Coin)/Cutom PGM (OPL)
EXTERNAL FINISH		
Drum		Stainless Steel Drum
Top Plate		Porcelain
Transparent Glass Window Door		0
Color		Platinum
Cabinet		Painted Steel
Cabinet Cover		Powder Painted Steel
Control Panel		Powder Painted Steel
Panel Frame		Powder Painted Steel
Panel Frame Lower		Powder Painted Steel
Window Display		Silk Screen
Window Display Sheet		Aluminum
CIRCUIT PROTECTION		
PCB Fuse - Main Control Board	amps	8 (220-240V) 12 (120V)
PCB Fuse - Filter Assembly	amps	15

		Non-Heater		
		Coin	Card	OPL
Single		F10C7FD4 TCW2013QS FH0C7FD4	F10C7FD7 TCW2013CS FH0C7FD7	F10C7FD3 TCW2013LS FH0C7FD3
Stack		-	-	-

* Dimensions and weights are approximate. * Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries. * Model name can be varied by countries.

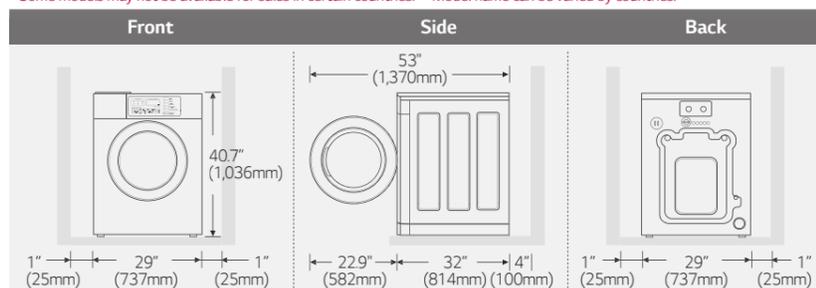

Dryer



		Gas
CYLINDER		
Drum Volume	cu.ft (l)	9.0 (254)
Diameter	in. (mm)	28.2 (716)
Depth	in. (mm)	24.2 (614)
Capacity	lb (kg)	30 (13.6)
DIMENSIONS		
Product (WxHxD)	in. (mm)	29 (737) x 40.2 (1,022) x 42.9 (1,090)
With Door Opening	in. (mm)	65.1 (1,655)
Carton (WxHxD)	in. (mm)	30.7 (781) x 44.7 (1,137) x 44.4 (1,128)
Weight (Product/Carton)	lb (kg)	220 (100)/240 (108.8)
RATING		
Electric Ratings	V/Hz/A	120/60/10
OPERATION		
Heating Type		Gas
Type of Drying	W	Ventilation
Air Flow	CFM	350
Drum Motor	KW	0.5 (120V/60Hz)
Fan Motor	KW	0.3
Gas Ratings	KW/BTU	16.1 (EU) ¹⁾ /55,000
CONNECTIONS		
Air Outlet Diameter	in. (mm)	6 (154)
Exhaust Airflow Diameter	in. (mm)	6 (154)
SYSTEM & CONTROL		
Pricing Program		Special Vended Price
Intelligent Electronic Controls		0
PROGRAMS		
Program List		High Temp Med Temp Low Temp No Heat
EXTERNAL FINISH		
Top Plate		Porcelain (Single) / Powder Painted Steel (Stack)
Transparent Glass Window Door		0
Color		Platinum
Cabinet		Painted Steel
Cabinet Cover		Powder Painted Steel
Control Panel		Powder Painted Steel
Panel Frame		Powder Painted Steel
Panel Frame Lower		Powder Painted Steel
Window Display		Silk Screen
Window		Aluminium

		Gas	
		Coin	Card / OPL
Single		RN1870AN4 TCD1870QGS	RN1870AH4 TCD1870CGS
Stack		RN1870AN2 TCD1870QGG	RN1870AH2 TCD1870CGG

* Dimensions and weights are approximate. * Design, features and specifications subject to change without notice.
* Some models may not be available for sales in certain countries. * Model name can be varied by countries.
1) Gas rating is different by countries.

